



Parts List




Top and Bottom Shelf Assembly

1. Attach support beams:

- Attach inner beams to side beams using M3 washers and M3x20mm screws.

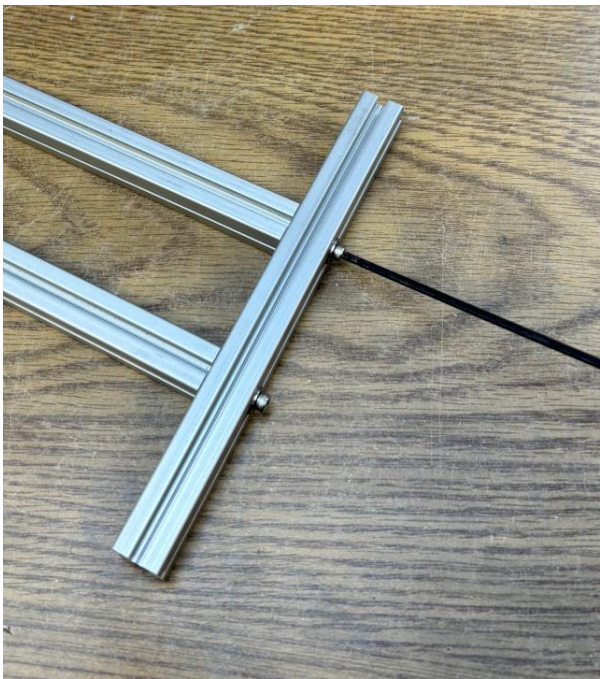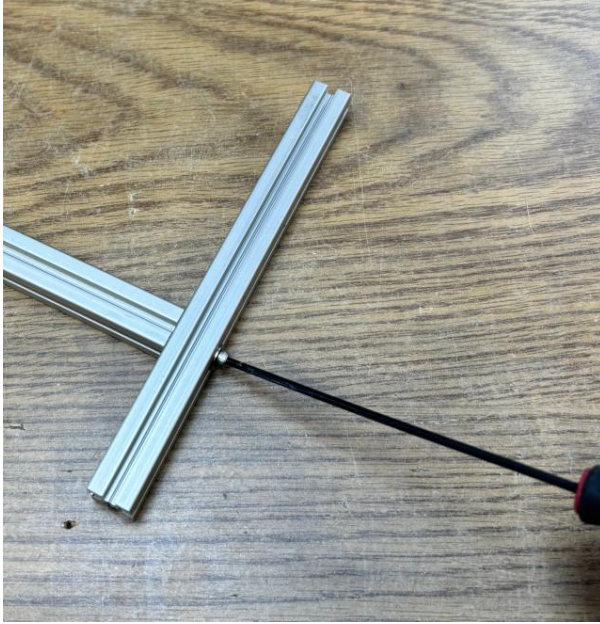

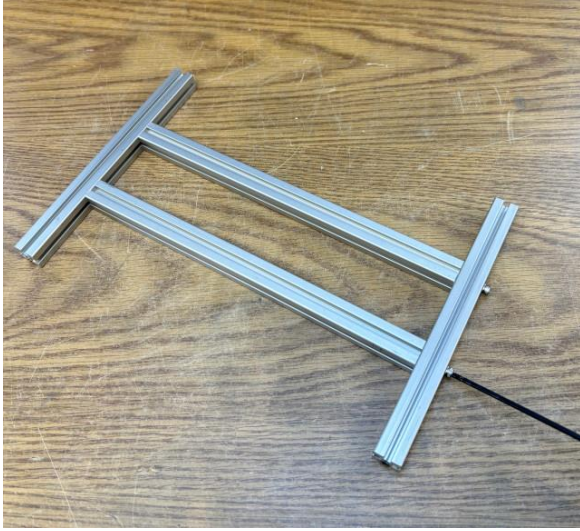

Post-to-Shelf Assembly

1. Attach the rubber feet:

- Secure the rubber feet to the bottom support beams using M3 hex nuts and M3x6mm bolts.



2. Attach the Bottom Shelf and Support Beams:

Threaded rack:

Start a M3x8mm bolt, washer, and hex nut through the bottom hole in the **long** leg of a rack post.



Square hole rack:

Start a M3x8mm bolt, **TWO** washers, and hex nut through the bottom hole in the **long** leg of a rack post.




- Insert the hex nut into the slot of the bottom shelf side beam.




Threaded rack:

Insert a support beam *underneath* the short leg of the rack post. Attach the beam to the side beam (and rack rail) using a M3 washer and M3x**25**mm screw.

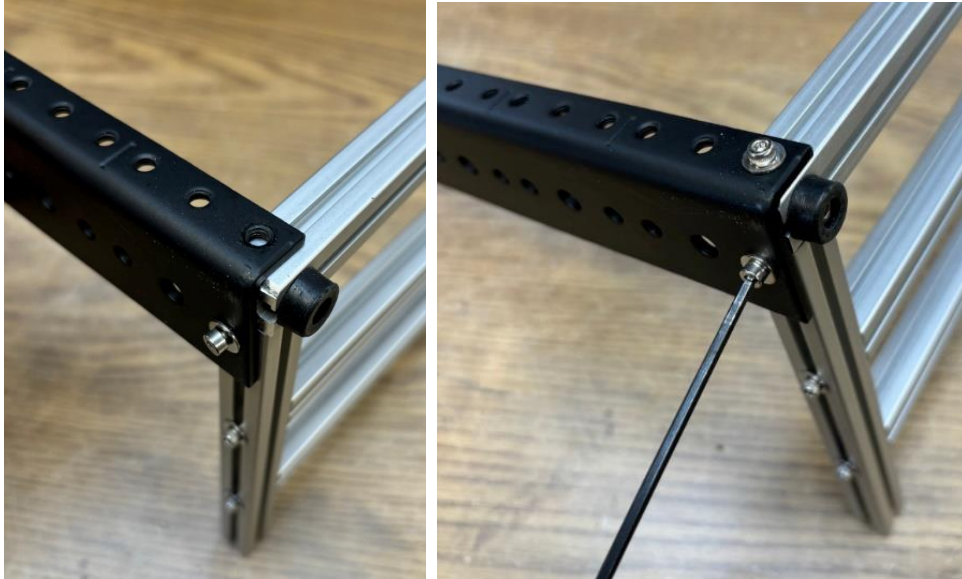

Square hole rack:

Insert a support beam *underneath* the short leg of the rack post. Attach the beam to the side beam (and rack rail) using a **SQUARE** washer, M3 washer and M3x**25**mm screw.

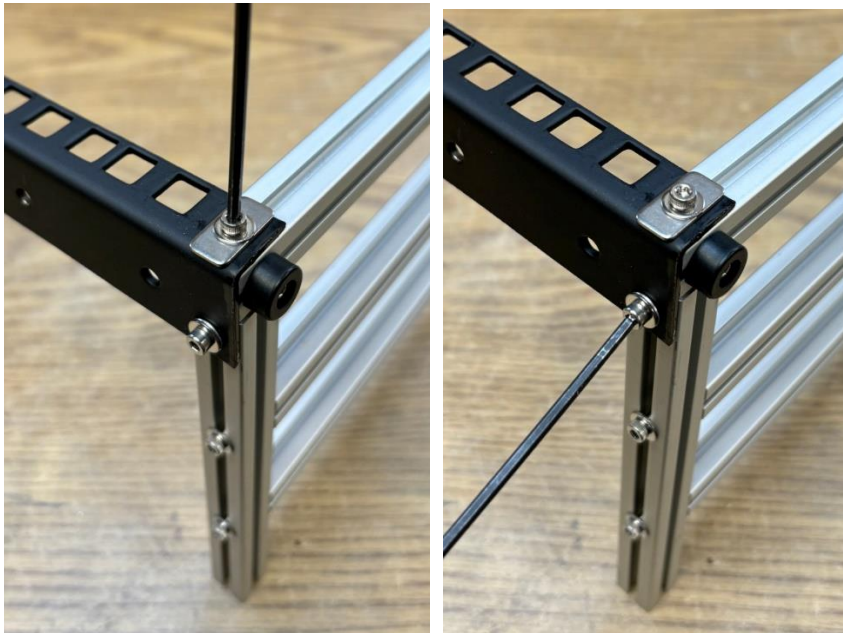


Note: The 25mm bolt should go *through* the bottom support beam and into the threaded hole at the end of the side beam.

- Attach another rack rail to the bottom shelf using the same methods, above.



3. Attach the Top Shelf to the Support Beams:

- Attach the top shelf and support beam to the rack rails using M3 washers and M3x25mm screws.

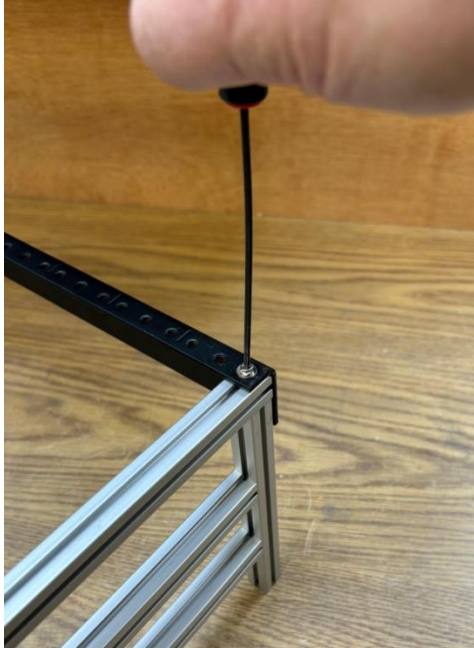



4. Attach the Remaining Two Rack Posts to the Top and Bottom Shelves:



